


# FMWSP10

## Screen Protector

### Installation Instructions



Stylistic 3400

The FMWSP10 screen protector is designed for use on the Stylistic 3400 pen tablet display screen.

#### Notes

- Before installing a new screen protector, remove any screen protector that is already installed. A notch in the corner of the screen protector allows you to slide a firm, pliable implement (such as a credit card) under the screen protector for removal. Do not use a metal implement; it could scratch the screen.
- To ensure good adhesion, clean the screen with a soft cotton cloth dampened with isopropyl alcohol before installing the screen protector. When the alcohol dries, it may leave streaks on the screen. If streaking occurs, buff the screen gently with a clean, dry cloth to remove streaks.

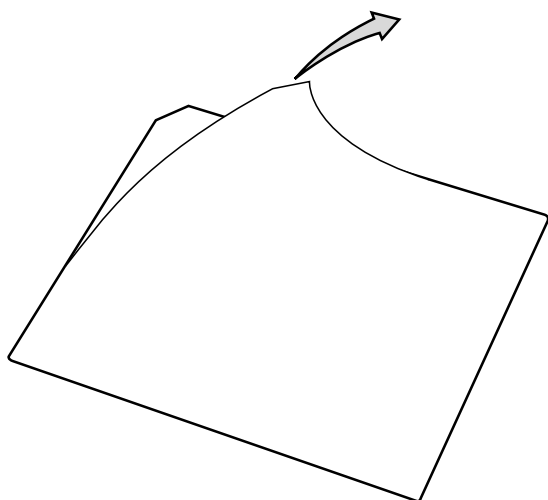


Figure 1. Peeling Protective Film

#### Installation Instructions

1. Peel the protective film from the adhesive side of the screen protector, as shown in Figure 1.
2. Install the screen protector on the pen tablet display screen. Apply the adhesive side to the screen with the notch in the lower left corner, as shown in Figure 2.

3. Apply pressure along the edges of the screen protector with your finger. (Avoid lifting the screen protector from the screen after it is installed. The adhesive requires 48 hours to cure properly.)

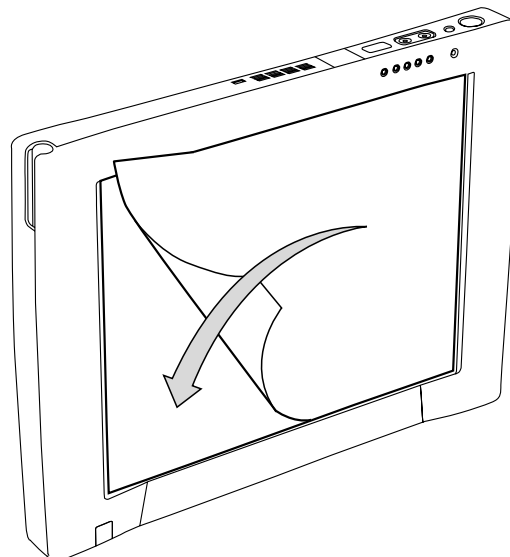


Figure 2. Installing the Screen Protector

4. Remove the protective film from the top of the screen protector, as shown in Figure 3.
5. Wipe the exposed surface of the screen protector with a clean dry cloth to remove any adhesive left behind by the protective film.

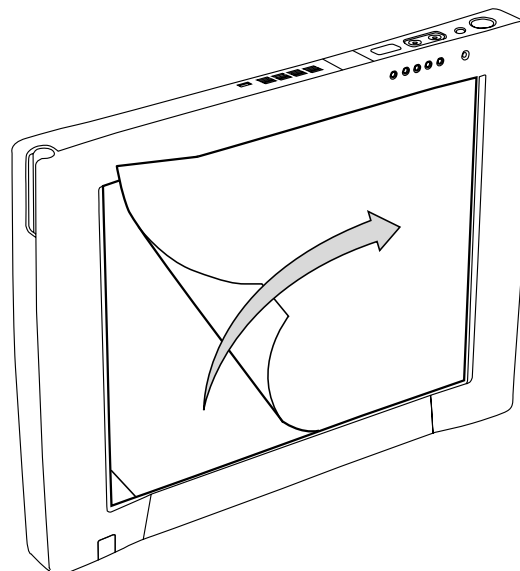


Figure 3. Removing the Protective Film